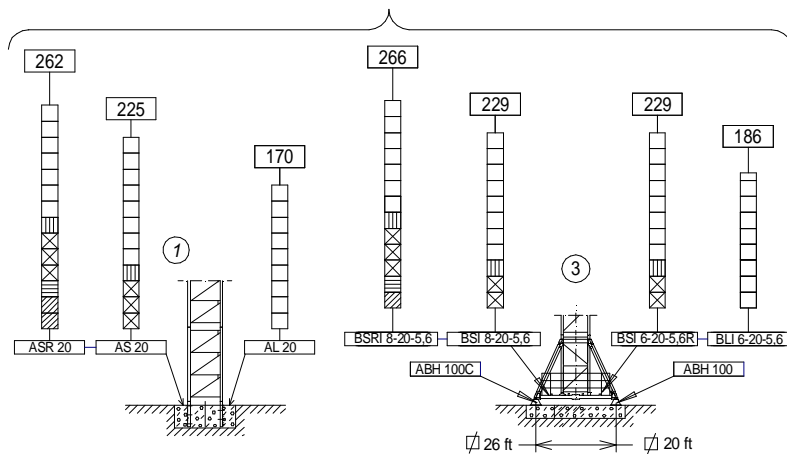
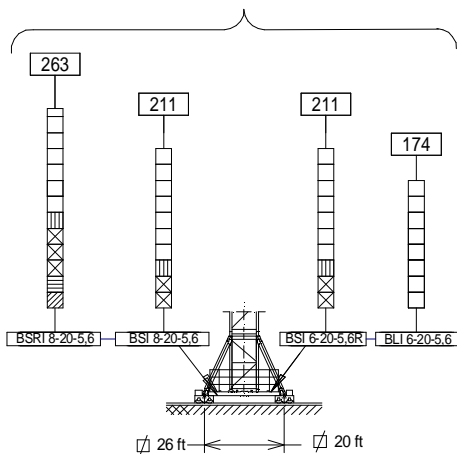


H = Altura máxima bajo gancho sin arristrar (ft).
Maximum height under hook without fastening (ft).

(H) TRASLACIÓN / TRAVELLING

(H) ESTACIONARIA / STATIONARY



- TL20
- TL20-5,6
- ▨ TS20-5,6A
- ⊠ TS20-5,6
- ▨ TSR20-5,6A
- ▨ TSR20-5,6

CARGAS / LOADS

J390

| SR (lb) | | Cargas máximas / Maximum loads SR – 26500 lb | | | | | | | | | | | | |
|---------|---------------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|
| [ft] | 26500 lb @ ... (ft) | Alcance del gancho [ft] / Hook reach [ft] | | | | | | | | | | | | |
| | | 49 | 66 | 82 | 98 | 115 | 131 | 148 | 164 | 180 | 197 | 213 | 230 | 246 |
| 246 | 91 | 26500 | 26500 | 26500 | 24300 | 20500 | 17600 | 15400 | 13700 | 12200 | 11000 | 10000 | 9100 | 8400 |
| 230 | 94 | 26500 | 26500 | 26500 | 25100 | 21200 | 18300 | 16000 | 14200 | 12700 | 11400 | 10400 | 9500 | — |
| 213 | 97 | 26500 | 26500 | 26500 | 26000 | 22000 | 18900 | 16600 | 14700 | 13200 | 11900 | 10800 | — | — |
| 197 | 101 | 26500 | 26500 | 26500 | 26500 | 23100 | 20000 | 17500 | 15500 | 14600 | 12600 | — | — | — |
| 180 | 107 | 26500 | 26500 | 26500 | 26500 | 24500 | 21100 | 18500 | 16500 | 14800 | — | — | — | — |
| 164 | 112 | 26500 | 26500 | 26500 | 26500 | 25800 | 22300 | 19600 | 17400 | — | — | — | — | — |
| 148 | 117 | 26500 | 26500 | 26500 | 26500 | 26500 | 23300 | 20500 | — | — | — | — | — | — |
| 131 | 120 | 26500 | 26500 | 26500 | 26500 | 26500 | 24000 | — | — | — | — | — | — | — |
| 115 | 115 | 26500 | 26500 | 26500 | 26500 | 26500 | — | — | — | — | — | — | — | — |
| 98 | 98 | 26500 | 26500 | 26500 | 26500 | — | — | — | — | — | — | — | — | — |

| SR / DR (lb) | | Cargas máximas / Maximum loads SR / DR - 26500 / 52900 lb | | | | | | | | | | | | |
|--------------|---------------------------|--|-------------|-------------|-------------|-------------|-------|-------|-------|-------|-------|------|------|------|
| [ft] | 26500/52900 lb @ ... (ft) | Alcance del gancho [ft] / Hook reach [ft] | | | | | | | | | | | | |
| | | 49 | 66 | 82 | 98 | 115 | 131 | 148 | 164 | 180 | 197 | 213 | 230 | 246 |
| 246 | 86/46 | 26500/49100 | 26500/35800 | 26500/27800 | 22500 | 18700 | 15900 | 13700 | 11900 | 10500 | 9300 | 8200 | 7400 | 6600 |
| 230 | 88/47 | 26500/50700 | 26500/37000 | 26500/28800 | 23300 | 19400 | 16500 | 14200 | 12400 | 10900 | 9700 | 8600 | 7700 | — |
| 213 | 91/49 | 26500/52500 | 26500/38400 | 26500/29900 | 24300 | 20200 | 17200 | 14800 | 12900 | 11400 | 10100 | 9000 | — | — |
| 197 | 96/51 | 26500/52900 | 26500/40400 | 26500/31500 | 25600 | 21400 | 18200 | 15700 | 13800 | 12100 | 10800 | — | — | — |
| 180 | 97/54 | 26500/52900 | 26500/42800 | 26500/33400 | 26500/27200 | 22700 | 19400 | 16800 | 14700 | 13000 | — | — | — | — |
| 164 | 106/57 | 26500/52900 | 26500/45100 | 26500/35300 | 26500/28700 | 24100 | 20600 | 17800 | 15700 | — | — | — | — | — |
| 148 | 110/59 | 26500/52900 | 26500/47200 | 26500/36900 | 26500/30100 | 25200 | 21600 | 18700 | — | — | — | — | — | — |
| 131 | 113/61 | 26500/52900 | 26500/48500 | 26500/38000 | 26500/31000 | 26000 | 22300 | — | — | — | — | — | — | — |
| 115 | 115/62 | 26500/52900 | 26500/49700 | 26500/38900 | 26500/31800 | 26500/26700 | — | — | — | — | — | — | — | — |
| 98 | 98/63 | 26500/52900 | 26500/50900 | 26500/39900 | 26500/32600 | — | — | — | — | — | — | — | — | — |

CARACTERÍSTICAS DE MECANISMOS / MECHANISMS FEATURES

J390

| *opcional *optional | | | | | | |
|------------------------|--|---------------------------|--|--|-----------------------------|------------------------|
| | *EC6080VF 45 kW | EC88115VF 65 kW | OG2208VF 3x5,5 kW | TC15105VF 11 kW | TG4025VF 4x7,5 kW | TH2006 15 kW |
| | | | 0...0,8 r/min sl/min | 26500 lb 0...344 ft/min 52900 lb 0...171 ft/min | 0...82 ft/min | 2 ft/min |
| | | | 480V 60Hz EC6080VF: AMPERAGE = 121 A EC88115VF: AMPERAGE = 152 A | | | |
| | ecoMode | | | | | |
| | $H \leq \begin{matrix} SR \\ DR \end{matrix}$ 1017 ft 509 ft | | 2638 ft | | | |

H: Altura bajo gancho / Height under hook


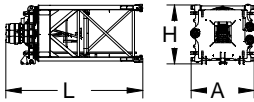

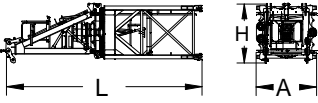











Para alturas intermedias tomar el lastre correspondiente a la altura superior / For intermediate heights take the ballast corresponding to the higher height



Fecha / Date: 16/01/2023

FEM 1001

Reservado el derecho a modificaciones sin previo aviso. Declinamos toda responsabilidad derivada de la información proporcionada / Subject to modification, without prior notice. This information is supplied without liability

| DENOMINACIÓN / DENOMINATION | | L [ft] | A [ft] | H [ft] | P / W [lb] | |
|--|------------|--|----------------------|-------------------|-------------------|-----------------------|
| Torre inferior <i>Lower tower</i> | TLI20-5,6 |  | 19.3 | 7.6 | 7.7 | 9300 |
| | TSI20-5,6 | | 19.6 | 7.6 | 7.8 | 11900 |
| | TSRI20-5,6 | | 19.7 | 7.4 | 7.4 | 14500 |
| | TRID24-5,6 | | 19.7 | 10.5 | 10.5 | 18500 |
| Torre <i>Tower</i> | TL20 | | 13.7 | 7.2 | 7.5 | 4600 |
| | TL20-5,6 | | 19.3 | 7.6 | 7.7 | 6400 |
| | TS20-5,6A | | 19.6 | 7.8 | 7.6 | 7800 |
| | TS20-5,6 | | 19.6 | 7.6 | 7.8 | 7800 |
| | TSR20-5,6A | | 19.4 | 7.8 | 7.6 | 9200 |
| | TSR20-5,6 | | 19.7 | 7.4 | 7.4 | 9300 |
| | TR24-5,6 | | 19.7 | 9.1 | 9.3 | 10500 |
| TRD24-5,6 | | 19.6 | 9.0 | 7.5 | 11600 | |
| Torre asiento pista + base punta de torre + orientación <i>Slewing table + tower head base + slewing mechanism</i> | |  | 17.5 | 8.2 | 8.3 | 16900 |
| Punta de torre <i>Tower head</i> | |  | 12.0 | 6.5 | 6.5 | 5000 |
| Conjunto asiento pista, punta de torre, orientación <i>Slewing table assembl +, tower head + slewing</i> | |  | 26.6 | 8.2 | 8.3 | 21900 |
| Armario eléctrico y plataforma <i>Electrical cabinet and platform</i> | |  | 9.0 | 5.3 | 8.1 | 2200 |
| Transporte torre de montaje <i>Jacking cage transport</i> | | TM20L-5,6  | 31.3 | 6.8 | 8.3 | 12500 |
| Tramo de pluma <i>Jib section</i> | PT19-31 |  | 33.3 | 5.2 | 7.2 | 6800 |
| | PT19-32+Tr | | 33.5 | 5.2 | 7.4 | 8100 |
| | PT19-33 | | 17.4 | 5.2 | 7.2 | 3700 |
| | PT19-34 | | 33.7 | 5.2 | 7.2 | 6300 |
| | PT19-35 | | 33.6 | 5.2 | 6.7 | 4900 |
| | PT19-36 | | 33.6 | 5.2 | 6.7 | 3600 |
| | PT19-37 | | 33.5 | 5.2 | 6.7 | 2500 |
| | PT19-28 | | 33.4 | 5.7 | 6.7 | 2100 |
| | PP19-39 | | 3.4 | 5.7 | 2.5 | 500 |
| Tirante sostén pluma <i>Jib support tie</i> | |  | 21.5 | 5.9 | 1.1 | 7000 |
| Contrapluma C0-19 <i>Counterjib C0-19</i> | |  | 15.6 | 6.4 | 1.7 | 5600 |
| Contrapluma C1-19 <i>Counterjib C1-19</i> | |  | 8.3 | 6.3 | 1.9 | 2100 |
| Contrapluma C2-19 con mecanismos (sin cable) + plumin auxiliar + armario eléctrico <i>Counterjib C2-19 with mechanism (without rope) + auxiliary jib + electrical cabinet</i> | |  | 39.4 | 6.9 | 7.7 | 21500 |
| Polipasto <i>Hook assembly</i> | | SR SR/DR  | 4.4 4.9 | 1.0 1.3 | 4.3 5.5 | 900 1600 |
| Carro <i>Trolley</i> | | SR SR/DR  | 7.6 8.7 | 7.9 7.7 | 5.3 7.0 | 1400 2500 |
| Plataforma y cabina (2 x 1,5) <i>Platform and cabin</i> | |  | 11.5 | 6.8 | 7.9 | 2400 |
| Contrapeso <i>Counterweight</i> | | Lastre Ballast  | 12.5 12.5 12.5 | 1.9 0.9 0.6 | 4.9 4.9 4.9 | 13200 6600 4400 |

